

Mini 3 Series Street Light



IP 65 Working Temp: -35°C~45°C Working Humidity: < 95%


Light Sources & Optics

Light Source: Lumileds
 Color Temperature: 4,000K (Options: 3,000K and 5,000K)
 Color Rendering Index: Ra>70
 L80 Lifetime @ 85°C: >55,000 hours
 Optic Lens: Polycarbonate

Electronics

Input Voltage: 120-277Vac,50/60Hz; 220-240Vac,50/60Hz
 Power Factor: >0.95


Dimensional Drawings

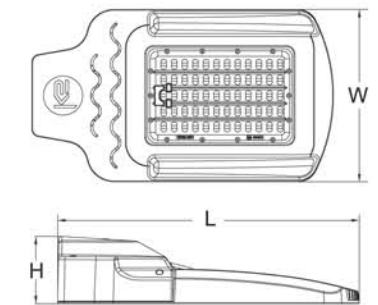

Ordering Information

Name	Model	Power (W)	Q'ty of LEDs	Flux (lm)	Dimension (mm)
Rural	RL021040	40	60	4,400	L440×W275×H140
	RL021060	60	60	6,000	

Light Distribution Curves

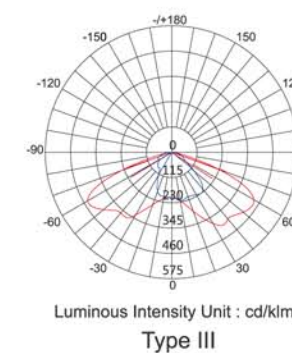

Description

Rural LED Street Light Series is primarily designed for countryside roadway and private lighting applications such as garden, factory and warehouse area lighting, with its low profile and wide coverage light distribution design. It offers unprecedented cost-efficient 40W and 60W model alternatives while minimizing the freight costs with rather compact and lightweight features.

Universal 120-277Vac input and optional $\phi 40$ and $\phi 60$ mm mounting interfaces realize the applications of maximum flexibility. 5 years standard warranty is provided along with top brand LEDs and LED drivers selected as well as the robust die-casting aluminum housing and advanced workmanship.